



AMT OATV Open Quad



Toll Free: (866) 314-2465

51790 County Road 39 • Middlebury, IN 46540

www.MiddleburyTrailers.com




OPEN HAULERS

SMOOTH LOADER

Car Hauler 2" Thick (nominal) Removable For fast and easy loading, nothing Pine Plank Treated Floor **Fenders** beats the Middlebury Trailers sleek and powerful Smooth Loader. The Smoothloader is available in a variety of configurations. 82" Deck Width on all Spring Axles and 3,500 lb. Torsion Axles Choices Include 80" Deck Width on 5,200 lb. Wood or Aluminum Bed • 3500, 5200 or 6000 lb. Axles Torsion Axles and up · Manual Tilt or Electric Tilt • Lengths From 18' to 24' For the Smooth Loader and AMCH Deck Over, you can add **Heavy Duty D-Rings** for additional flexibility in securing your loads!



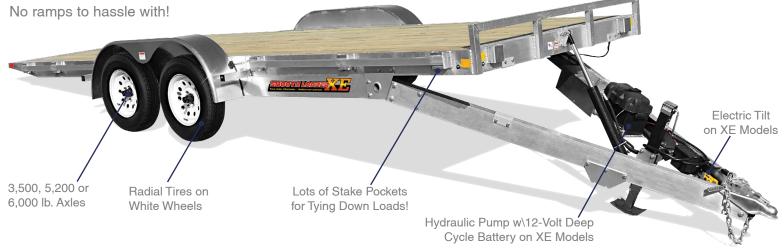


7" Tall Front Rail





XM Model = MANUAL TILT XE Model = ELECTRIC TILT

Toll Free: (866) 314-2465 51790 County Road 39 • Middlebury, IN 46540 www.MiddleburyTrailers.com



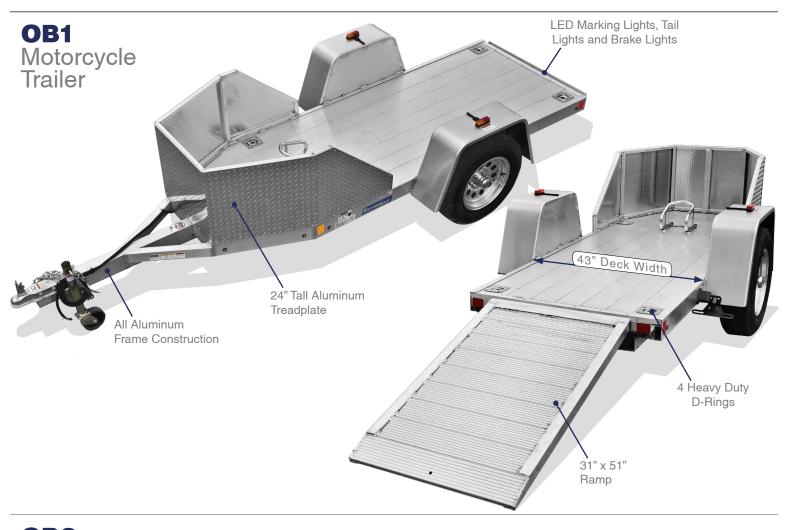

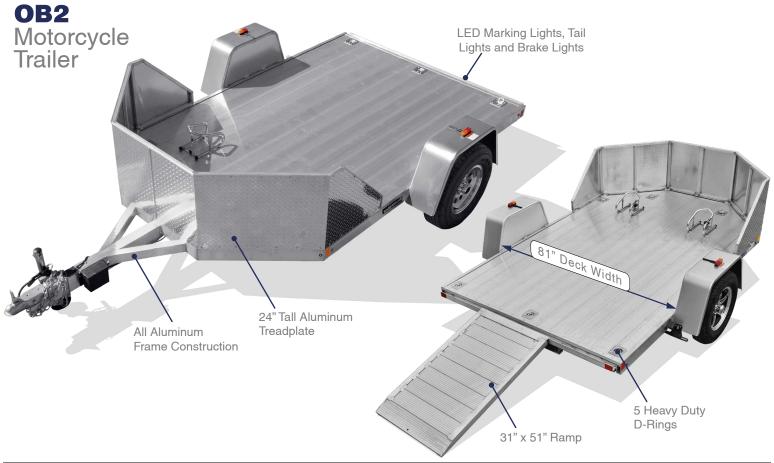

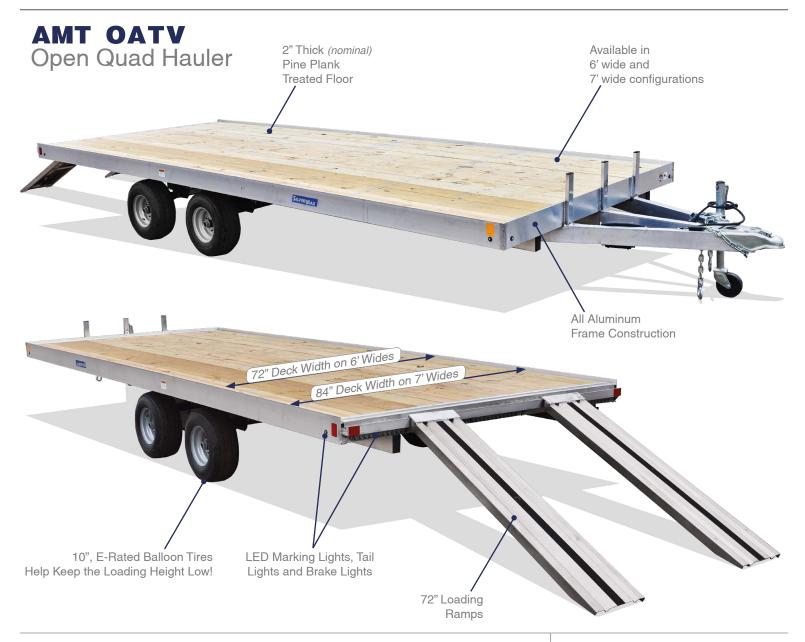

OPTIONAL WHEELS

Take your trailer to the next level with your choice of sporty wheels!



Aluminum Mod



Series 14

Middlebury Trailers is a proud member of the National Association of Trailer Manufacturers



Toll Free: (866) 314-2465

51790 County Road 39 • Middlebury, IN 46540

www.MiddleburyTrailers.com

	a	a					
	Smooth Loader XM	Smooth Loader XE	AMCH	AMCH Deck Over	OB1	OB2	AMT OATV
Hitch							
Coupler With Safety Chains	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2"	2"	2" 4
6" Underslung Tongue	No	No	No	Yes	No	No	No
Tongue Jack or Front Jack Capacity	7,000 lb.	7,000 lb.	2,000 lb.	2,000 lb.	1,000 lb.	1,000 lb.	1,000 lb.
Axle and Brakes							
Spring or Torsion Axles Depending	Either	Either	Spring	Spring	Torsion	Torsion	Torsion
Electric Brakes	Yes	Yes	Yes	Yes	No	Yes	Some Models
Tires and Rims							
20.5 X 8-10 LRE Bias Ply Tires	N/A	N/A	N/A	N/A	N/A	N/A	Yes
ST205/75R15 C Rated Radial Tires For Single Axle	N/A	N/A	N/A	N/A	Yes	Yes	No
ST205/75R15 C Rated Radial Tires For TA2 Axles	Yes	Yes	Yes	Yes	No	No	No
ST225/75R15 D Rated Radial Tires For TA3 Axles	Yes	Yes	Yes	Yes	No	No	No
ST235/80R16 E Rated Radial Tires For TA4 Axles	Yes	Yes	Yes	Yes	No	No	No
Frame							
All Aluminum Frame Construction	Yes	Yes	Yes	Yes	Yes	Yes	Yes
24" Beavertail on 18' and Longer Models	No	No	Yes	No	No	No	No
7" Tall Aluminum Tube "Headache" Rack	Yes	Yes	Yes	No	No	No	No
Heavy Duty D-Rings or Rope Ties	Opt	Opt	4 D-Rings	Opt	4 D-Rings	7 D-Rings	6 Rope Ties
Stake Pockets with Rub Rail	Yes	Yes	Yes	Yes	No	No	No
2" Thick (nominal) Pine Plank Treated Floor	Yes	Yes	Yes	Yes	No	No	Yes
Extruded Aluminum Floor	Opt	Opt	Opt	Opt	Yes	Yes	No
Exterior							
Deck Width	82"	82"	81"	98"	43"	81"	72" or 84"
Deck Height (approximate) 1	24" ²	24" ²	23" ²	33-1/2" ²	16-1/2"	16-1/2"	26-1/2"
Removable Fenders	Yes	Yes	Yes	No Fenders	No	No	No Fenders
Electrical							
LED Tail Lights, Brake Lights, and Marking Lights	•	•	•	•	•	•	•
4-Way, or 7-Way Plug for 3,000 lb GVWR and up	•	•	•	•	•	•	•
Breakaway Box, Battery and Switch	•	•	•	•	0	•	•
Hydraulic Pump w\12-Volt Deep Cycle Battery	No	Yes	N/A	N/A	N/A	N/A	N/A

For general reference only. Deck heights will vary depending on axle capacity, axle type and tire sizes.

⁴ 2-5/16" on Tandem Axle Models

Available Sizes							
	TA2	TA3	TA4				
Smooth Loader XM (Manual) or XE (Electric)							
18'	•	0	•				
20'	•	0	•				
22'	•	•	•				
24'	•	•	•				
AMCH - Car Hauler							
18'	•	0	•				
20'	•	0	•				
22'	•	•	•				
24'	•	•	•				
AMCHDO - Deck Over							
16'	•	•					
18'	•	•					
20'	•	0					

Available Sizes							
	Single Axle	Tandem Axle					
OB1 & OB2 - Motorcycle Trailers							
4.5'x10' OB1	•						
8.5'x11' OB2							
AMT OATV - 6' Wide, 7' Wide							
6'x8'	•						
6'x10'	•						
6'x12'	•	•					
6'x14'		•					
6'x16'		•					
7x12'		•					
7x14'		•					
7x16'		•					
7x18'		•					

3-year Limited Warranty. See your dealer for details!

Your Professional MTI Dealer is:

Toll Free: (866) 314-2465

51790 County Road 39 • Middlebury, IN 46540

www.MiddleburyTrailers.com

² For models with TA2 axles (Tandem 3,500 lb. axles)

³ Yes, on Tandem Axle Models